


Colores • Colors • Couleurs • Farben / Largo • Width • Laise • Breite: ★300 cm

Muestra • Sample

8C-680 ★	8C-676 ★	8C-629 ★	3C-615 ★	30-C665* ★
9C-600 ★	0C-620 ★	0C-619 ★	1C-678 ★	1C-679 ★
2C-677 ★	2C-670 ★	2C-628 ★	2C-669 ★	2C-627 ★
9C-601 ★	9C-559 ★	9C-626 ★	1C-671 ★	9010 ★
1C-616 ★	1C-630 ★	5C-614 ★	7C-668 ★	7c-613 ★

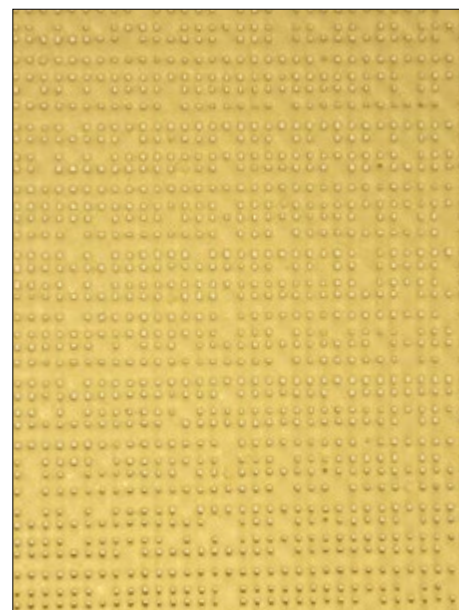

* Consultar disponibilidad o pedido mínimo * Check availability or minimum order * Consulter disponibilité ou minimum de commande * Konsultieren Sie Verfügbarkeit oder Mindestbestellmenge



SERVICIOS

- Corte de piezas
- Metreado
- Colores personalizados
- Libre de aftalatos
- Anchos personalizados

SERVICES

- Roll slitting
- Metered rolls
- Customized colours
- Phthalate free
- Customized widths

SERVICES












- Découpe de pièces
- Métrage
- Couleurs personnalisées
- Sans aftalates
- Découpe de pièces

DIENSTLEISTUNGEN

- Zurechtschneiden von Stücken
- Meterware
- Farbe nach Kundenwunsch
- Phthalatfrei
- Kundenspezifische Breiten

Características técnicas • Technical features • Caractéristiques techniques • Technische Daten

Material base • Base material Matériel de base • Trägergewebe	 100% PES
Hilos • Yarn count Fil • Garn	 1100 dtex
Tipo de recubrimiento • Type of coating Type d'enduction • Beschichtungsart	 PVC
Acabado • Finish Finition • Endausrüstung	 Mate -Lacado acrílico 2 caras • Matt -Lacquered on both sides Mat -Laqué acrylique 2 faces • Matt -Beidseitig Acryllack hochglanz beschichtet

		Especificación • Specification Spécification • Spezifikation	Unidades • Units Unités • Einheiten	Método • Test Method Méthodes • Methode	Nominal • Target Nominal • Wert
	Gramaje • Total weight Poids Total • Flächengewicht		g/m ²	EN ISO 2286-2	500
	Resistencia Tracción • Tensile strength Résistance Rupture • Reißfestigkeit	URDIMBRE • WARP • CHAÎNE • KETTE TRAMA • WEFT • TRAME • SCHUSS	daN/5cm daN/5cm	EN-ISO-1421 EN-ISO-1421	260 200
	Resistencia Desgarre • Tear strength Résistance Déchirure • Weiterreißfestigkeit	URDIMBRE • WARP • CHAÎNE • KETTE TRAMA • WEFT • TRAME • SCHUSS	daN daN	DIN-53363 DIN-53363	40 30
	Adherencia 23°C • Adhesion 23°C Adhérence 23°C • Haftung 23°C		daN/5cm	EN ISO 2411	9
	Temperaturas máximas • Temperature resistance Températures extrêmes d'utilisation • Temperaturbeständigkeit		°C	EN 1876	-30/+70
	Ancho • Width Laise • Breite		cm	EN ISO 2286-1	250
	Filtro UV • UV Filter Filtre UV • UV-Filter				OK
	Tratamiento antifúngico • Antifungal treatment Traitement anti-moisissures • Fungizid Ausgerüstet				OK
	Transmisión lumínica • Light transmission Transmission lumière • Lichtdurchlässigkeit		360h	EN-410:1598	Consultar tabla colores Check color table Consulteur tableau coloris Konsultieren Farbtabelle
	Reacción al fuego • Flame retardant Réaction au feu • Brenverhalten			NF P 92-512:1986 UNE 23727-90 EN 13773:2003	M2 M2 CL1
	Espesor • Thickness Grosueur • Dicke		mm	EN ISO 2286-3	0,61



La información facilitada corresponde a valores promedio de un producto recién fabricado con un rango de tolerancia de +/-10 %, se facilita como indicación y guía solamente, sin ninguna vinculación jurídica. Los valores proporcionados se refieren al estado original de la mercancía enviada antes del procesamiento o elaboración por parte del cliente. Por razones técnicas puede haber ligeras variaciones durante la producción, así como pequeñas alteraciones del color, las referencias al RAL son solo indicativas. El cliente como propietario del diseño debe comprobar la aptitud y compatibilidad del producto para el uso previsto antes de proceder a su procesamiento o elaboración.

The information provided corresponds to average values of a newly manufactured product with a tolerance range of +/- 10% which is provided as an indication and guidance only, without any legal binding. The values provided refer to the original status of the goods sent before processing or handling by the customer. For technical reasons there may be slight variations during production, as well as slight color alterations, the RAL references are only indicative. The customer as owner of the design must check the aptitude and compatibility of the product for the intended use before proceeding with its processing or elaboration.



ACREDITADO POR ENAC

INDUSTRIAL **SEDÓ**

Desde 1889



+34 977 65 50 07

info@industrialsedo.com

www.industrialsedo.com

Industrial Sedó, S.L.

Camí Mas Llagostera S/N

43762 La Riera de Gaià

(Tarragona) Spain

www.industrialsedo.com



ACREDITADO POR ENAC